



How Safe Are Your Floors ?

Slip Risk Assessments - Safety Compliance Certification - Anti-Slip Solutions

How safe are your floors?

Each type of flooring requires a particular friction coefficient for its purpose.

Even though floorings should be compliant with the international standards, many floors become critical of even fail when wet.

Even more important is to be safe in a hospitality, public and professional environment.

It is compulsory and your social responsibility to be compliant with the international safety standards and regulations in order to provide your guests and staff a safe environment.

So, how safe are your floors?

What can Hotel Safety Solutions do for you?

Hotel Safety Solutions offers slip risk assessments of your floorings what comes with a complete professional slip risk assessment report.

When a floor turns out to be compliant with the international regulations (EU/US/UK/BS) we will provide you with a Safety Compliance Certificate.

The anti-slip solution with 5 years warrantee

The Hotel Safety anti-slip system

The Hotel Safety anti-slip system is specially designed to increase the friction of slippery floors in wet and dry situations

Hotel Safety Anti-Slip is a professionally applied and anti-slip treatment for floorings in hospitality, commercial, institutional and industrial properties to minimize risk of slips and falls.

Hotel Safety Non-Slip is an invisible anti slip solution which produces coefficient of friction levels that are safer in wet and dry conditions

Hotel Safety anti-slip is non-acid and biodegradable.


After treatment the friction of the floorings will be increased dramatically.



Friction measurement of a marble floor

A Few Existing Customers



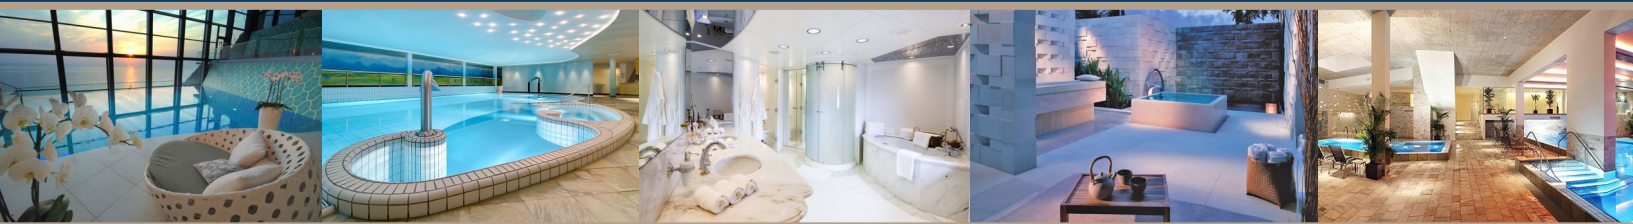

Benefits of certification

- Shows safety of your premises floorings, bathing and leisure facilities.
- Protects you against injury compensations.
- Avoids negative publicity.

Why should you assess ?

- Compliant floorings can get certified.
- Social responsibility towards guests and staff.
- Shows status quo of floor safety level.
- Opportunity to consider appropriate action for identified concerning areas.

How do we define slippery?

- Each type of floor requires a particular friction coefficient (CoF) to be safe for its purpose.
(A dancing flooring requires different grip level than a gym flooring).
- These CoF's or grip levels are guide-lined by several international bodies.
- By the measurement results against the standards by using special devices.

Test Protocols:

- ASTM E303 - CTIOA: BS:7976.2
- Item No 5 Slip Resistance of Floors, Stairs & Paving
- GLC Department of Architecture & Civil Design: March 1971
- UK Slip Group, Issue 3 November 2005.
- BS: 8204 4586. AS/NZS ISO Draft Standard 10454-17.
- European Council Directive. Article 16 (1) of Directive 89/391/EEC(89/654/EEC) 9.1, Bulletin No 43 (2nd Series)

Most advanced non-slip coating

Endorsed by

Ceramic Tile Institute of America



Benefits of Gaia Anti Slip

- Floors ready to use direct after installation.
- No disturbing for guests or staff.
- No-acid, biodegradable, "green" products.
- No visually amending the appearance of the floor.


Suitable for

- Pool decks, spa's, locker rooms
- Bathrooms, showers, bathtubs
- Kitchens, pantries, stewarding
- Buffets, restaurants, outlets
- Entrance, lobby, stairs, ramps
- Outer Pedestrians areas, etc.

Applied Standards

- HSL/HSE/HSA in accordance with
 - British Standard, BS: 7976-2 (2002)
 - The UK Slip Resistance Group (2005)

Note: "British Standards" are produced by BSI Group which is incorporated under a Royal Charter and is formally designated as the National Standards Body (NSB) for the UK and recognized worldwide. BS-7976 is for slip resistance.

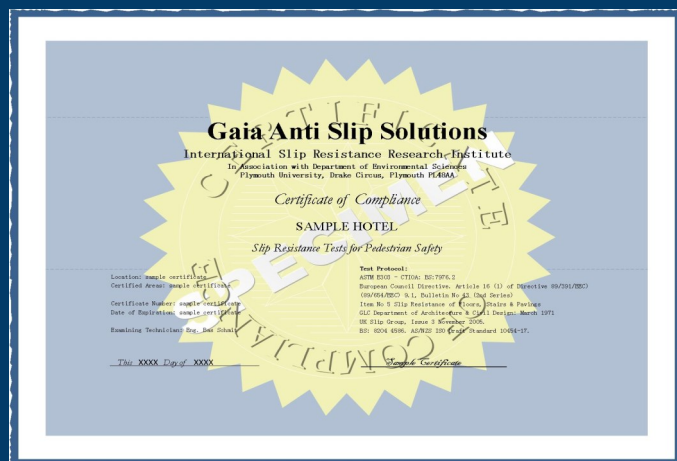

Services

- Anti-slip treatments
- Surface friction measurements
- Certification
- Expert Witness-risk Assessments
- Risk Assessments
- Consultancy

Hotel Safety Solutions

- Greece** ☎ +30 2297 054 809
+30 697 449 2436
- Netherlands** ☎ +31 61 97 60 531

info@hotel-safetysolutions.com www.hotel-safetysolutions.com